


# Seamless Self-Flashing Skylights (SSF)


VTECH's Patented **Seamless Self-Flashing Skylight** is a simple install for new skylight applications, and is as durable and leak-resistant as the rest of the roof. No pre-built curb is necessary for the SSF installation. Due to the nature of the aliphatic polyurethane, VTECH's Solid-State Skylights, as opposed to traditional skylights, can be installed with any type of roofing products and materials. Available in standard sizes for residential or commercial applications, these superior products are backed by an all inclusive 10 to 20-year transferable warranty, based on the product.

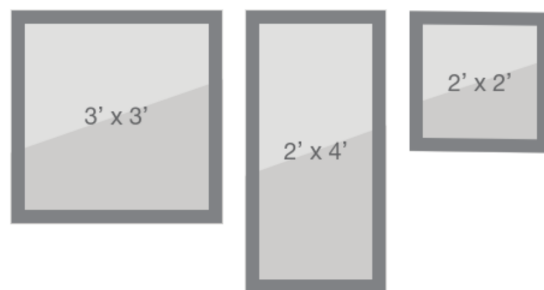

Size Code	Product Description	U-Factor Value* with Insulation Board Installed	U-Factor Value without Insulation Board Installed	Solar Heat Gain Coefficient (SHGC)
2x2 SSF	Standard Glass	0.43**	0.57	0.24
2x4 SSF		0.43**		
3x3 SSF		0.43**		
2x2 SSF	Safety Glass	0.42**	0.56	0.24
2x4 SSF		0.42**		
3x3 SSF		0.42**		
2x2 SSF	Hurricane Glass	0.39**	0.53	0.24
2x4 SSF		0.39**		
3x3 SSF		0.39**		

+All products meet the Green Seal Standard for Windows, GS-13, for governing energy efficiency, heavy metals in the frame and sash materials, packaging, and consumer education materials.

\*3/4" Polyisocyanurate/Polyurethane based insulation board with a minimum R-Value of 4.5 per inch required to achieve listed U-Values.

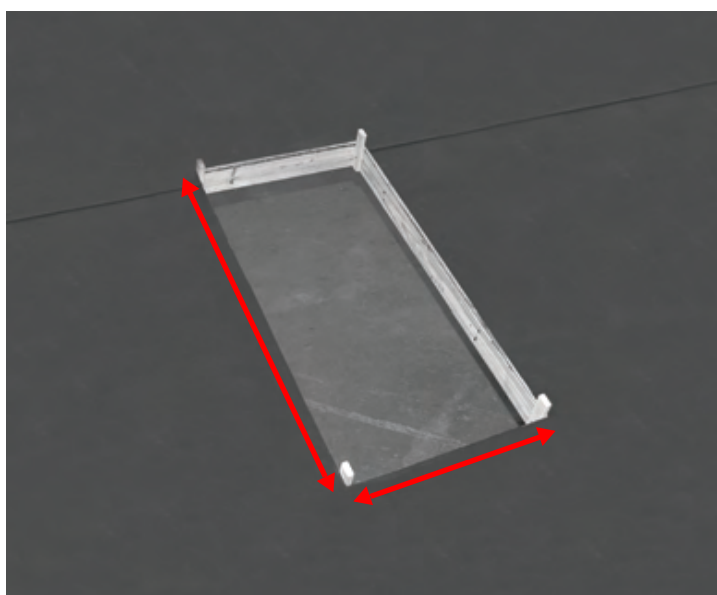

Size Code	Rough Opening	Finished Opening	Fits on Center Spacing
2X2 SSF	22 1/2" x 22 1/2"	21 1/2" x 21 1/2"	24"
2X2 SSF	22 1/2" x 22 1/2"	21 1/2" x 21 1/2"	24"
2X2 SSF	22 1/2" x 22 1/2"	21 1/2" x 21 1/2"	24"
3X3 SSF	30 1/2" x 30 1/2"	29 1/2" x 29 1/2"	16"
3X3 SSF	30 1/2" x 30 1/2"	29 1/2" x 29 1/2"	16"
3X3 SSF	30 1/2" x 30 1/2"	29 1/2" x 29 1/2"	16"
2X4 SSF	22 1/2" x 46 1/2"	21 1/2" x 45 1/2"	24"
2X4 SSF	22 1/2" x 46 1/2"	21 1/2" x 45 1/2"	24"
2X4 SSF	22 1/2" x 46 1/2"	21 1/2" x 45 1/2"	24"



## VTECH Skylights